



FIREFIELD™

Red/Green Reflex Sight USER MANUAL

FEATURES:

- Precision accuracy
- Perfect for rapid fire or moving target shooting
- Multi-reticle (4 patterns)*
- Red or green reticle option
- Unlimited eye relief
- Quick target acquisition
- Adjustable reticle brightness

INCLUDED ACCESSORIES:

- Adjustment tools
- Rubber lens cover
- Battery

SPECIFICATIONS:

Power	(x)	1
Objective aperture	(mm)	33x24
Field of view	(m @ 100m)	635
1 click	(MOA)	1
Length	(in)	4.5
Weight	(oz)	3.2

DIAGRAM:

1. Brightness control
2. Reticle selection
3. Windage
4. Elevation
5. Battery compartment

BATTERY ASSEMBLY:

The Firefield Red/Green Reflex Sight uses one 3V Lithium battery (CR2032 or equivalent). Should the reticle grow dim or not illuminate, the battery needs to be replaced. To install a new battery, unscrew the battery cover and insert the battery with the + side up and replace the cover.

MOUNTING:

Check to make sure that all included items are present. This sight includes an integrated rail that fits standard Weaver and dovetailed bases, which are suitable for most applications. Due to the unlimited eye relief of the sight, allow at least three inches of clearance between the end of the LED, mirror housing and your eye when shooting. To mount, loosen the clamp by unscrewing the two large bolts located on the right side of the unit. Place the unit on the rail with the objective facing toward the muzzle; adjust as needed. Make sure the sight is sitting flat on top of the rail, and that one of the clamping bolts is located in a recoil groove. When the sight is in place, re-tighten the clamp.

ZERO ADJUSTMENT:

1. Select the desired reticle by turning the reticle selector knob and set the intensity to a level that is most comfortable for you.
2. With the sight securely mounted, rest the gun on a solid support and aim at a target 50 to 100 yards (or meters) away. All test shots should be made under the same conditions to achieve maximum accuracy – this includes using the same rest and same cartridge type.
3. Fire a test group to see where the gun is shooting.
4. Adjust the reticle accordingly by changing the elevation & windage adjustments until the reticle is zeroed on the point of impact of the bullet. (Note - each click adjustment moves the point of impact by 1 MOA; approximately 1" at 100 yds, 1/2" at 50 yds). Adjust the elevation first, then tighten the locking screw using the small allen wrench that is included. Then adjust the windage.

WARNING / CAUTION:



1. Always unload your rifle or handgun before mounting.
2. When zeroing the sight follow all standard firearm safety precautions.
3. Avoid hitting or dropping the unit, as this may cause damage.

FIREFIELD 1 YEAR LIMITED WARRANTY

This Firefield product is warranted to be free of defects in materials and workmanship for 1 year. In the event of a defect under this warranty, we will, at our option, repair or replace the product. This warranty does not cover damages caused by misuse or improper handling. Also, this warranty is null and void if modification or maintenance is provided by someone other than Firefield. This warranty is non-transferable and is only valid if the product is registered within 30 days after the product has been purchased.

FOR WARRANTY SUPPORT, CONTACT:

Firefield
info@firefieldtactical.com

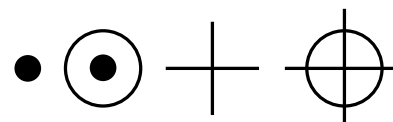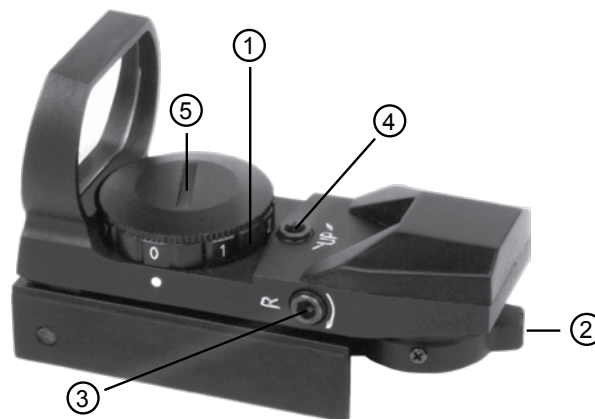

* 3 MOA dot, crosshair, 10 MOA dot crosshair
and 65 MOA circle with 3 MOA dot

